


PACIFIC GIRDER TROLLEYS


Dimensions & Specifications

Single pin Push & Geared Trolley

Type	PPT204	PPT205	PPT210	PPT220	PPT230	PPT250
Rated Capacity kg	250	500	1000	2000	3000	5000
Min radius of curve m	0.8	0.8	1.0	1.1	1.3	1.4
Dimensions A	177	245	311	327	343	355
B	175	194	246	276	332	377
C	162	187	222	262	309	353
H	88	105	125	150	171	196
S	28	30.5	38	38	40	42
D	20	25	30	38	40	42
G	28	32	40	52	63	75
F	1.5-3	1.5-3	1.5-3	1.5-3	1.5-3	1.5-3
Net weight kg	5	6.5	10.5	17.5	27	41

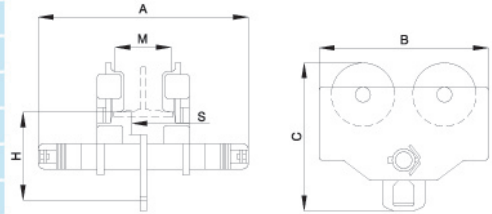

Type	PGT205	PGT210	PGT220	PGT230	PGT250
Rated Capacity kg	500	1000	2000	3000	5000
Min Radius of curve m	0.8	1.0	1.1	1.3	1.4
Dimensions A	275	338	349	364	374
B	194	246	276	332	377
C	187	222	262	309	353
H	105	125	150	171	196
S	30.5	38	38	40	42
D	25	30	38	40	50
G	32	40	52	63	75
F	1.5-3	1.5-3	1.5-3	1.5-3	1.5-3
Net Weight kg	10.5	14.5	21.5	31	46

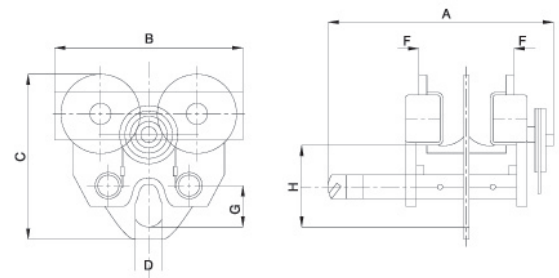

Twin Pin Series 2

Type	PPT280	PPT290
Rated Capacity kg	8000	10000
Min radius of curve m	2.0	2.0
Dimensions A	474	480
B	426	442
C	388	396
H	185	190
S	45	45
D	72	72
G	110	110
F	2-3.5	2-3.5
Beam width range mm	124-305	124-305
Net Weight kg	79	89

